

# X CROSS GASKET

## Ideal for flange gaskets in plastic piping !

### Features

Outstanding functionality and ease of use, uniquely designed by a pump manufacturer !  
This gasket has been used in our products for many years with proven performance !

- Made entirely of FPM (fluorocarbon rubber, Daiel®) for superior resistance to acidic liquids.
- Compared with Teflon gaskets, its elasticity ensures better sealing performance.
- Equipped with two tabs for easy handling.
- Suitable not only for pump applications but also for use as flange piping gaskets in a wide range of applications.



YD-GSF series



YD-GVF series

Tab for easy handling.




### Lineup

<For JIS 10K>

Dia	Model	D1	D2	D3	D4	n	e	d1	d2	t
25	WFP-X25	30	90	62	125	4	19	38	53	3
40	WFP-X40	43	105	80	140	4	19	54	69	3
50	WFP-X50	54	120	94	155	4	19	68	83	3
65	WFP-X65	69	140	120	175	4	19	86	101	3
80	WFP-X80	80	150	130	185	8	19	98	112	3

(mm)

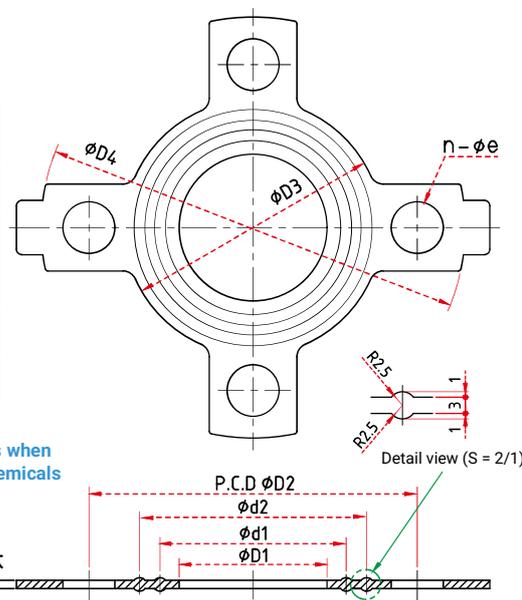

- Material : FPM (Acid-resistant fluoroelastomer)
- Operating liquid temperature range : -5 ~ 150 °C
- Maximum operating pressure : 1.37MPa

\*Please consult us when using alkaline chemicals or solvents.

Pump & Oil collecting system  
**WorldChemical Co.,Ltd.**

URL <https://www.wcc.co.jp/en>

E-mail [overseaschemical@wcc.co.jp](mailto:overseaschemical@wcc.co.jp)

■ Note